

# **VISIBLE LIGHT EMITTING DIODE**

## **DATA SHEET**

**MODEL NO: GT3-4G02D10G**

REV. : 2.0

DATE : 11-MAY.-2009



### ■ DESCRIPTIONS:

- 3mm Round lamp
- Lens color: Green Diffused
- Emitting Color: Bright Green
- No Stopper
- Dice Material: GaP

### ■ APPLICATIONS:

- TV set
- Monitor
- Telephone
- Computer
- circuit board


### ■ ABSOLUTE MAXIMUM RATINGS (Tamb=25,unless otherwise specified)

Parameter	Test condition	Symbol	Ratings	Unit
Forward Current		IF	20	mA
Power Dissipation		PD	50	mW
Peak Forward Current	tp/T=0.1, tp=100μs	IFP	100	mA
Reverse voltage		VR	5	V
Operating Temperature		To Pr	-40~+85	°C
Storage Temperature		Tstg	-40~+100	°C
Soldering Temperature		Tsol	260°C for 5 sec Max (2mm from Body)	

**Basic Characteristics**(T<sub>amb</sub>=25,unless otherwise specified)

Parameter	Symbol	Min.	Type	Max.	Unit	Test Condition
<b>Forward Voltage</b>	<b>VF</b>		2. 2	2. 6	V	IF=20mA
<b>Luminous Intensity</b>	<b>I<sub>v</sub></b>	300		500	mcd	IF=20mA
<b>Reverse Current</b>	<b>I<sub>R</sub></b>			80	μA	VR=5V
<b>Peak Wavelength</b>	<b>λ<sub>p</sub></b>		560	565	nm	IF=20mA
<b>Dominant Wavelength</b>	<b>λ<sub>p</sub></b>	570			nm	IF=20mA
<b>View Angle</b>	<b>2θ<sub>1/2</sub></b>		20		deg	IF=20mA

- **Dimensions:**

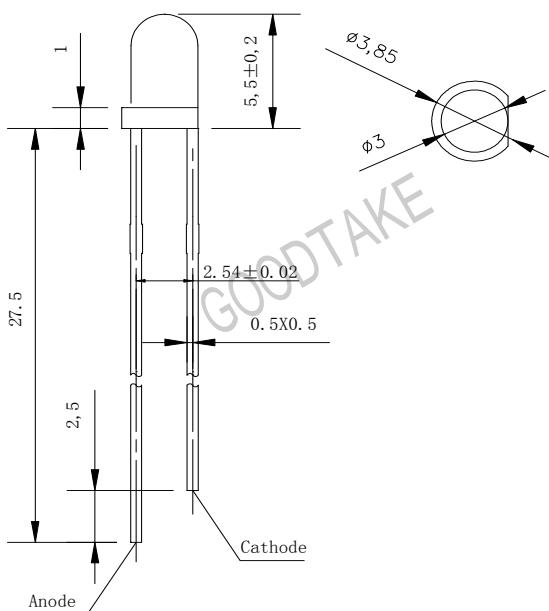

**NOTE:** 1. All dimensions are in millimeter, tolerance is ±0.5mm unless otherwise noted.

2. Epoxy meniscus extends ≤1 mm down to the lead is allowed.

■ Typical electro-optical characteristics curves

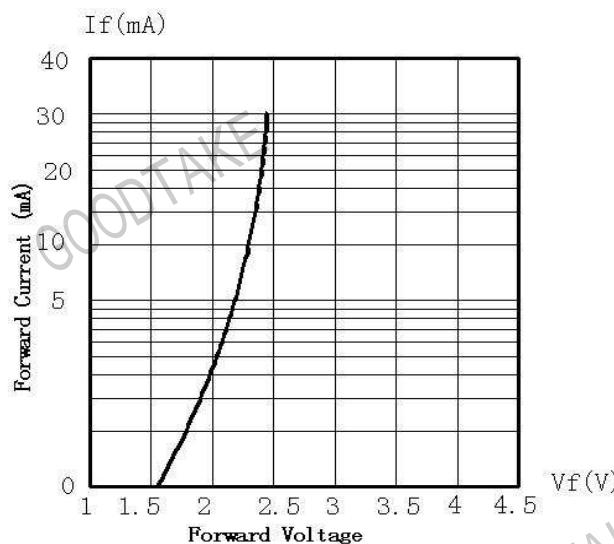


Fig.1 forward Current vs. Forward Voltage

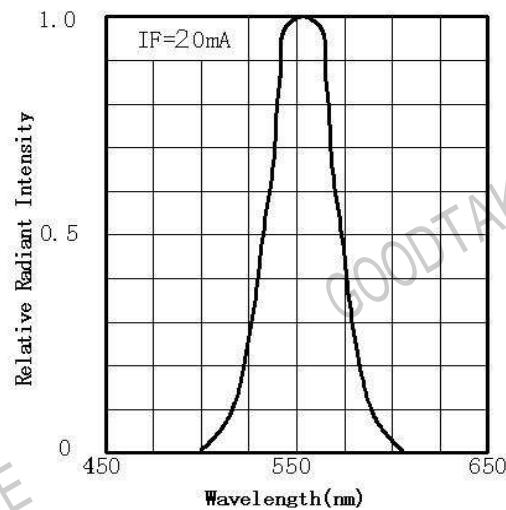


Fig.2 Spectral Distribution

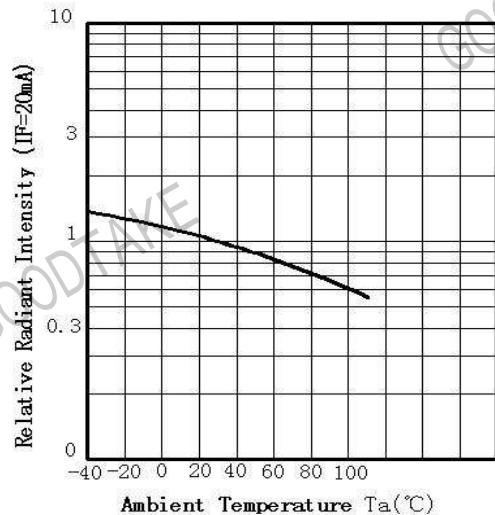


Fig.3 Ambient Radiant Intensity Vs Ambient Temperature

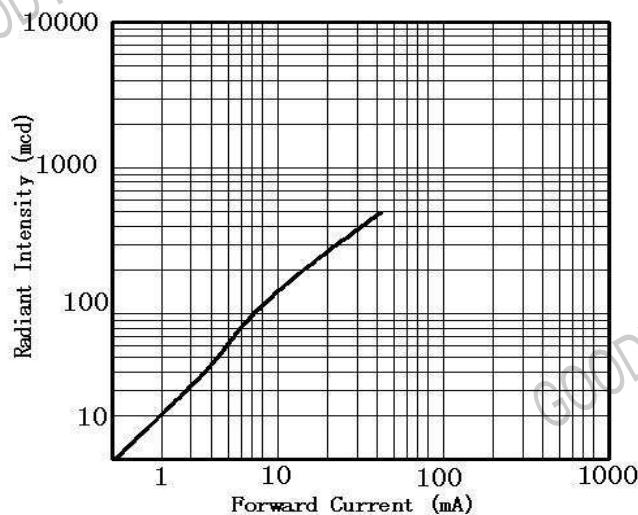


Fig.4 Forward Current Vs Radiant Intensity

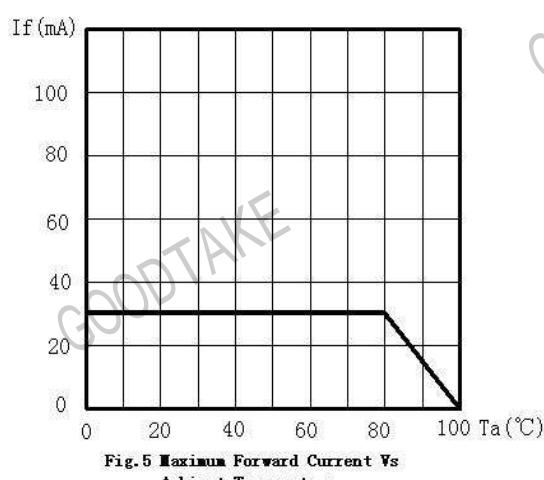


Fig.5 Maximum Forward Current Vs Ambient Temperature

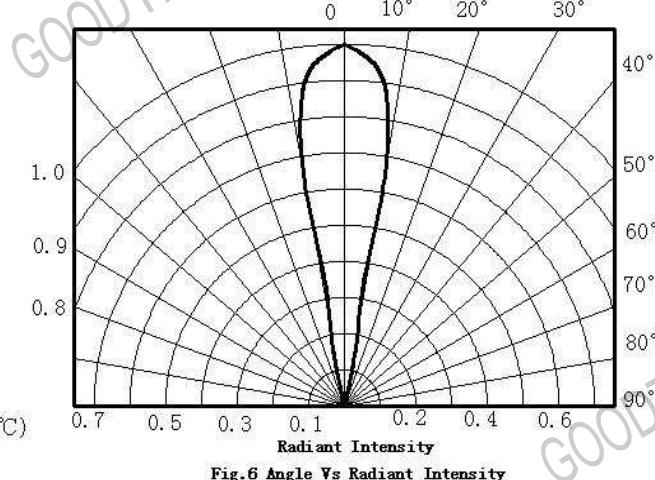


Fig.6 Angle Vs Radiant Intensity